

Technical data sheet

Trunking unit with brush bar

Item number: 7403816



Ready-to-mount trunking unit for cable routing and device installation, consisting of a trunking base with two covers and a height-adjustable brush bar. The scope of delivery contains two lid butt seals and one connector. For height adjustment, six height adjustment units are required. Load capacity up to a maximum of 5 kN. The trunking unit can be supplemented with an adjustable covering contact profile for screed limitation in areas of door soffits and in front of radiator alcoves.




St Steel

FS Strip galvanized

Master data

Item number	7403816
Description 1	Flushfloor trunking unit
Description 2	with brush bar
Manufacturer	OBO
Dimension	2000x273x80
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	2
Unit of quantity	Metre
Weight	1425 kg
Weight unit	kg/100 m

Dimensions

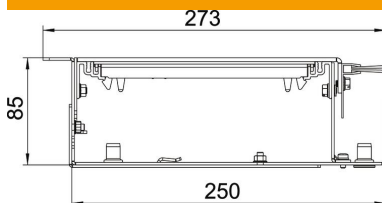

Length	2,000 mm
Width	250 mm
Height	93 mm
Dimension h	85 mm

Technical data sheet

Trunking unit with brush bar



Item number: 7403816

Technical data

Mounting opening cover	no
Number of compartments	2 St.
Floor plate	yes
Floor care	Dry
Cover fastening, locking	yes
Seal installation option	no
Installation opening for on-floor tank	no
Decouplable	yes
Suitable for expansion joint	no
Mesh wall	no
Minimum screed height	93
With connection opening	no
With equipotential bonding	no
With separating retainer	no
With overhang	yes
Mounting opening	Without
Nominal size for device installation units	250
Height-adjustment range, min.	0 mm
Usable cross-section	11500 mm ²
Removable cover	yes
Cross-section, draw a	4231 mm ²
Cross-section, draw b	7306 mm ²
Heavy-duty version	yes
Separating retainer fastening	stecken
Vertical load, large area	to 5,000 N
Vertical load, small area	to 3,000 N
Separating retainer fastening	Plug